

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

PATENT APPLICATION

INVENTOR: Vasu IYENGAR; & Richard M. UBOWSKI

IYENGAR 8-10
CONFIGURABLE ECHO CANCELLER

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:

Enclosed are the following papers relating to the above-named application for patent:


Specification (including claims and Abstract) - 17 pages
6 Informal sheets of drawing(s)
1 Assignment with Cover Sheet
Declaration and Power of Attorney

| CLAIMS AS FILE | | | | |
|---|-----------|-----------|------------|--------------|
| | NO. FILED | NO. EXTRA | RATE | CALCULATIONS |
| Total Claims | 22 - 20 = | 2 | x \$18 = | \$36 |
| Independent Claims | 3 - 3 = | 0 | x \$78 = | \$0 |
| Multiple Dependent Claim(s), if applicable | | | \$260 = | \$0 |
| Basic Fee | | | | \$760 |
| | | | TOTAL FEE: | \$796 |

Please file the application and charge **Lucent Technologies Deposit Account No. 12-2325** the amount of **\$796** to cover the filing fee. Duplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 12-2325** as required to correct the error.

Please address all correspondence to **FARKAS & MANELLI, PLLC, 2000 M Street, N.W. 7th Floor, Washington, DC 20036-3307**, and all telephone calls to William H. Bollman at his Washington, DC local number of (202) 261-1000.

Respectfully submitted,



William H. Bollman

Reg. No.: 36,457

Attorney for Applicant(s)

Date: January 22, 1999

Farkas & Manelli, PLLC
2000 M Street, N.W. 7th Floor
Washington, DC 20036-3307
(202) 261-1000

APPLICATION UNDER UNITED STATES PATENT LAWS

Invention: **CONFIGURABLE ECHO CANCELLER**

Inventors: Richard M. UBOWSKI; and
Vasu IYENGAR

Farkas & Manelli P.L.L.C.
2000 M Street, N.W.
7th Floor
Washington, D.C. 20036-3307
Attorneys
Telephone: (202) 261-1000

This is a:

- ☐ [] Provisional Application
- ☒ [X] Regular Utility Application
- ☐ [] Continuing Application
- ☐ [] PCT National Phase Application
- ☐ [] Design Application
- ☐ [] Reissue Application
- ☐ [] Plant Application

SPECIFICATION

CONFIGURABLE ECHO CANCELLER

BACKGROUND OF THE INVENTION

1. Field of the Invention

5 This invention relates generally to echo cancellation. More particularly, it relates to a configurable echo canceller which adapts between audio echo cancellation and/or hybrid echo cancellation based on the particular application.

10 2. Background of Related Art

 An echo canceller is an electrical device which removes interfering information from a signal caused by an electrical or acoustical echo of the signal. Echo cancellation has many uses, but is well known for its use in telephone systems to remove echoes during a conversation
15 on a telephone line.

 Electrical echoes are most typically caused in customer premises telephone equipment (e.g. a telephone) when a signal passes through a hybrid (otherwise known as a telephone line interface (TLI)) to the telephone line. A hybrid provides isolation between the telephone and
20 the telephone line. The better the hybrid, i.e., the better the isolation, the larger the reflection or echo of the signal back into the telephone. A conventional device used at the customer premises telephone equipment to eliminate the effect of reflections or echoes caused by the hybrid are generically termed hybrid echo cancellers (HECs).

25 Other reflections of a telephone signal causing audible echoes in the conversation are caused by the physical environment in which the telephone sits. For instance, acoustical reflections are caused from the speaker back to a microphone in the telephone when sounds output from the speaker are picked up by the microphone. This most
30 frequently occurs when the output sound bounces off the ceiling, walls

and other structures in the room. Acoustical reflections typically cause uncomfortable feedback such as squealing in the signal output from the speaker.

5 Different acoustical reflections or echoes may also be caused at different times, depending on the distance between the speaker, the particular reflecting surface (e.g., the ceiling or any of the four walls), and the return path to the microphone. For instance, an acoustical echo would be caused on a telephone line a fixed amount of time after the speech originated. This fixed amount of time is based on
10 the time it takes sound to travel from the speaker, to the reflecting surface, and then to the microphone. Not all rooms are the same size, nor is a telephone placed in the same spot in all rooms. Thus, because of the uncertainty as to the particular dimensions of a room and the proximity of the telephone to the walls and/or other structures in the room, it is difficult
15 to know beforehand the specific needs of an acoustical echo canceller. Higher end acoustical echo cancellers adaptively train themselves to the particular acoustical echoes experienced by a telephone, while lower end acoustical echo cancellers have predetermined tap values set on the presumption of certain average or median conditions, e.g., 6 feet from the
20 speaker and microphone to the ceiling (assuming that the customer premises telephone equipment is placed on a table), and, e.g., 10 feet from the speaker and microphone to the surrounding wall surfaces. Acoustical echo cancellers are most prevalent in speakerphone type applications.

25 Initially, echo cancellers were analog devices which sampled a pure main signal at a point before it was affected by a reflection or echo, delayed the sampled pure signal, and subtracted the delayed pure signal from the main signal to output a signal corresponding to the pure main signal with the effects of any reflections or echoes removed. Thus,

ideally, the delayed pure signal cancels out the reflected signal picked up by the microphone and reintroduced into the main signal.

More recently, particularly as digital signal processors (DSPs) and other high performance processors became cost effective, software algorithms have been developed to perform an acoustical echo cancellation or a hybrid echo cancellation on a digitized signal. Conventional acoustical echo cancellers suppress audio picked up by a microphone which was output by a speaker on the same telephone. These conventional AECs are typically adaptive, speech trained and monitored and adjusted as necessary for optimal performance.

Conventional customer premises telephone equipment includes an acoustic echo canceller and/or a hybrid echo canceller as appropriate for the application. For instance, Fig. 6 shows the relevant portion of a cordless telephone including a cordless handset **602** and a base unit **604**. The cordless handset **602** typically includes a microphone and a speaker to allow a telephone conversation to take place, and an acoustical echo canceller **606** to cancel any acoustical echoes caused in the telephone signal. There is typically no hybrid echo canceller in the cordless handset **602** because there conventionally are no hybrids in the cordless handset **602**.

On the other hand, the base unit **604** interfaces to a telephone line from a central office via a telephone line interface, i.e., a hybrid. Accordingly, a hybrid echo canceller **608** is typically included in the base unit **604** of a cordless telephone to remove unwanted signal disruptions and noise caused by reflections of the main signal caused by the hybrid in the base unit **604**. However, because the base unit **604** does not typically include a speaker and a microphone, there is typically no AEC in the base unit **604**.

Accordingly, a designer conventionally picks and chooses an AEC or an HEC based on a particular application, and manufacturers

provide either an AEC or an HEC for each particular application. For instance, in a cordless handset **602**, a particular AEC might be chosen for use while in the base unit **604**, a particular HEC might be chosen. This causes the need to manufacture such a cordless telephone with two
5 separate echo cancellation parts, with associated inventory and costing requirements.

In the event of a combined requirement for both an AEC and an HEC within the same unit, manufacturers will typically customize a combined HEC and AEC for use with the particular application.

10 Thus, many different types of echo cancelers must be manufactured, inventoried and maintained, e.g., AECs, HECs, and AEC/HEC combinations. Unfortunately, the use of many different types of echo cancelers complicates manufacturing, maintenance, and overall cost.

15 There is thus a need for an echo canceller which is flexible enough to be used in various echo cancellation roles, including acoustical and/or hybrid echo cancellation roles, to reduce the need for the many different conventional types of echo cancelers.

20 SUMMARY OF THE INVENTION

In accordance with the principles of the present invention, an echo canceler comprises an echo canceler module capable of configuration as one of an acoustic echo canceler and a hybrid echo canceler. A control register is adapted to configure the echo canceler
25 module as the acoustic echo canceler or the hybrid echo canceler.

A method of configuring an echo canceler module as either an acoustic echo canceler or as a hybrid echo canceler in accordance with another aspect of the present invention comprises configuring the echo canceler module as one of an acoustic echo canceler and a hybrid
30 echo canceler. The echo canceler module is operated in an operation

mode utilizing the echo canceler module as configured. The echo canceler module is reconfigured as the other of the acoustic echo canceler and the hybrid echo canceler.

5 **BRIEF DESCRIPTION OF THE DRAWINGS**

Features and advantages of the present invention will become apparent to those skilled in the art from the following description with reference to the drawings, in which:

Fig. 1 shows an echo canceler in accordance with the principles of the present invention implemented in each of a cordless handset receiver and a base unit for a cordless telephone system.

Fig. 2 shows the configurable echo cancelers of Fig. 1 in more detail.

Fig. 3 shows an exemplary control register controlling exemplary switchable parameters of the configurable echo canceler shown in Fig. 2.

Figs. 4A and 4B show audio connections of the configurable echo canceler implemented in a base unit as an HEC (Fig. 4A) or as an AEC (Fig. 4B).

Fig. 5 shows audio connections of the configurable echo canceler implemented as an AEC in a cordless handset.

Fig. 6 shows the relevant portion of a conventional cordless telephone including a conventional AEC in the cordless handset and a conventional HEC in the base unit.

25

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The present invention provides a configurable echo canceller which can perform acoustical or hybrid echo cancellation under software control. In this way, e.g., the same echo canceler can be implemented in each of the cordless handset and the base unit of a

cordless telephone but each configured differently, thus reducing manufacturing and maintenance costs.

In the disclosed embodiment, a cordless telephone application includes a configurable echo canceler for separate installations in each of the cordless handset receiver **102** and in the base unit **104**. Moreover, in the disclosed cordless telephone application, the configurable echo canceller includes a control register or other device to configure the various configurable features of the echo canceller depending on the application.

For instance, the number of filter taps can be adjusted depending on the mode of the reconfigurable echo canceller. The disclosed configurable echo canceller can also be set for single or double precision taps, for sub-band or full-band operation, and/or for full-band/sub-band center clipper operation with or without comfort noise.

Fig. 1 shows a configurable echo canceler **106a**, **106b** in accordance with the principles of the present invention implemented in each of a cordless handset receiver **102** and a base unit for a cordless telephone system **110**.

As configured in the disclosed embodiment, the configurable echo canceler **106a** in the cordless handset receiver **102** is software configured (e.g., using a register) to operate in a suitable AEC mode, while a similar configurable echo canceler **106b** in the base unit **104** is software configured to operate in a suitable AEC or HEC mode.

Fig. 2 shows the configurable echo cancelers **106a**, **106b** of Fig. 1 in more detail.

In particular, in Fig. 2, the configurable echo cancelers **106a**, **106b** are each formed with an echo canceler module **204**, an echo canceler filter tap bank **206**, a control register **202**, and suitable summation circuitry **112**. The same type configurable echo canceler **106**

shown in Fig. 2 forms the basis for both of the configurable echo cancelers **106a**, **106b** shown in Fig. 1.

One difference in the disclosed embodiment between the configurable echo canceler **106a** in the cordless handset receiver **102** and the configurable echo canceler **106b** in the base unit **104** is their respective configurations, set by a control word stored in a control register **202**. Preferably, but not necessarily, the control register **202** is either formed in non-volatile memory or is loaded in an initialization sequence from a program residing in non-volatile memory. Moreover, it is preferred that audio processing in the equipment utilizing the configurable echo canceler **106** be disabled or muted until the configuration of all configurable echo cancelers is assured.

Preferably, each of the configurable echo cancelers **106a**, **106b** are implemented as a software routine running on a suitable processor, e.g., on a digital signal processor (DSP). In the disclosed embodiment, the configurable echo cancelers are each adapted to have certain adjustable parameters to allow operation as an AEC or as an HEC.

The x and y in Fig. 2 refer to the configurability of the basic unit of memory in the echo canceler **204**, e.g., byte (8 bits) or word (16 bits). The accuracy of filter coefficients in the echo canceler **204** is related directly to the number of bits used for the coefficients. For example, increased accuracy can be obtained by using two words vs. one for the coefficients. Accordingly, in configuring the echo canceler **106** as either an AEC or as an HEC, one may preferably use single precision for configuration as an AEC (i.e., using byte length coefficients), and double precision for configuration as an HEC (i.e., using word length coefficients).

Fig. 3 shows the control register **202** in more detail. The control register **202** outputs settings for switchable parameters in the configurable echo canceler **106** shown in Fig. 2.

In particular, the reconfigurability of the echo canceler **106** is provided by an on/off type bit setting for each of the following: long/short span select **502**, step size for quick or slow adaptation **504**, tap refresh on or off **506**, adaptation mode (NLMS or recursive least square) **508**, sub-band or full-band center clipper **510**, and sub-band or full-band echo cancellation **512**.

Long/short span select **502**: The span of the echo canceler is selected based on the echo path in question. One aspect of an echo canceler is modeling the echo path impulse response. The length of the impulse response is different for differing applications. For example, typical acoustic echoes have a span of 17-50 milliseconds (mS) depending on room size. On the other hand, in the case of an HEC, typically only 7-15 mS is required.

In the disclosed embodiment, a choice of one or two spans is provided. A short span of 7-15 mS is preferred for configuration as an HEC, while a long span of 17-50 mS is preferred for configuration as an AEC. Of course, additional spans and/or spans of different length may be provided depending upon the particular application.

Step size for slow/quick adaptation **504**: Step size is directly related to speed of adaptation, and is also related to a final mis-adjustment error after convergence of the echo canceler taps. If the step size is large, the mis-adjustment error will be large. The converse is also true. For an HEC, the echo path remains fixed, so the step size can be small because the speed of adaptation is therefore not important. However, for an AEC, the echo path can change so the step size should be large. Thus, a small step size is preferred for configuration of the reconfigurable echo canceler **106** as an AEC. Of course, additional step sizes or alternative step sizes may be provided within the principles of the present invention.

Tap refresh on/off 506: In certain instances, it is desirable for the echo canceler taps to be continuously updated. For example, an optimal set of taps may be created for an HEC (having a fixed echo path) and tap refresh (i.e., tap update) may not be desirable. However, for an AEC, tap refresh or update may be always enabled due to the typically changing echo path. Thus, if the configurable echo canceler 106 is being configured as an HEC, the tap refresh 506 is preferably set to an OFF condition using the register settings 202, or if being configured as an AEC, the tap refresh 506 is preferably set to an ON condition.

Adaptation mode (NLMS or RLS) 508: There are several conventionally available adaptation algorithms. In general, greater speed of adaptation and smaller mis-adjustment is achievable with more complex algorithms which require more MIPS and memory. Depending upon the particular application, a less or more complex configurable echo cancellation algorithm may be used and configured as necessary in accordance with the principles of the present invention. For example, an HEC with a fixed echo path may preferably be set to NLMS, whereas an AEC may preferably be set to recursive least square (RLS) to provide for fast adaptation.

Sub-band or full-band center clipper 510: Center clipper is a signal processing block that attenuates signals below a given threshold and passes through signals above that given threshold. Center clipper is typically used to reduce residual echo. A full-band center clipper acts on a full band signal, whereas a sub-band center clipper first filters the signal into different frequency bands, and then independently center clips within each band.

Center clipping is a non-linear operation. Thus, a high center clipping threshold will introduce noise and distortion throughout the band. Therefore, a full band center clipper distorts full band, while a sub-band introduces distortion into only the band it's operating on.

Accordingly, each threshold can be tuned separately in a sub-band center clipper.

Sub-band or full-band echo cancelation 512: In a sub-band center clipper as described above, the principles are the same. Here you
5 can have an echo canceler which filters the entire band or a sub-band echo canceler which operates in different frequency bands.

Figs. 4A and 4B show audio connections of the configurable echo canceler **106b** in the base unit **104** as either an HEC (Fig. 4A) or as an AEC (Fig. 4B).

10 In particular, Fig. 4A shows a microphone input signal input to line **A** in Fig. 2, a telephone line out signal output from line **B**, a telephone line in signal input to line **C**, and a speaker out signal output from line **D**, when the configurable echo canceler **106b** in the base unit **104** is configured as an HEC.

15 Fig. 4B shows a line in signal input to line **A** in Fig. 2, a speaker out signal output from line **B**, a microphone in signal input to line **C**, and a line out signal output from line **D**, when the configurable echo canceler **106b** in the base unit **104** is configured as an AEC.

Fig. 5 shows audio connections of the configurable echo
20 canceler **106a** in the cordless handset receiver **102**.

In particular, Fig. 5 shows a microphone in signal input to line **A** in Fig. 2, a handset out to the base unit or to the handset output from line **B**, a handset in signal from the base or the handset input to line **C**, and a handset speaker signal output from line **D**, when the configurable
25 echo canceler **106a** in the cordless handset receiver **102** is configured as an AEC.

Figs. 4A, 4B and 5 show fixed audio connections of the configurable echo cancelers **106a**, **106b**. However, the audio connections may be operably switched to the configurable echo cancelers **106a**, **106b**,

either using a digital switch, analog relay, or other means, to allow various modes for the telephone, e.g., a cordless telephone.

In particular, the principles of the present invention allow switchable operation of elements requiring one type echo canceler in a particular mode while requiring another type echo canceler in another mode. For instance, utilizing the principles of the present invention, a configurable echo canceler **106** in each of the cordless handset receiver **102** and base unit **104** allows operation of the cordless telephone **110** in either a normal mode, intercom mode, base speakerphone mode, or handset speakerphone mode.

In the normal mode wherein the cordless handset is used, the configurable echo canceler **106b** in the base unit **104** may be configured as an HEC only, and the configurable echo canceler **106a** in the cordless handset receiver **102** may not be necessary.

In the intercom mode, both the configurable echo canceler **106a** in the cordless handset receiver **102** and the configurable echo canceler **106b** in the base unit **104** may be configured as AECs.

In the base speakerphone mode, the configurable echo canceler **106b** in the base unit **104** may be configured as both an HEC and an AEC, while the configurable echo canceler **106a** in the cordless handset receiver **102** may be configured as an AEC.

In a handset speakerphone mode, the configurable echo canceler **106b** in the base unit **104** may be configured as an HEC, while the configurable echo canceler **106a** in the cordless handset receiver **102** may be configured as an AEC.

While the invention has been described with reference to the exemplary embodiments thereof, those skilled in the art will be able to make various modifications to the described embodiments of the invention without departing from the true spirit and scope of the invention.

CLAIMS

What is claimed is:

1. A echo canceler, comprising:
 - 5 an echo canceler module capable of configuration as one of an acoustic echo canceler and a hybrid echo canceler; and
 - a control register adapted to configure said echo canceler module as said one of said acoustic echo canceler and said hybrid echo canceler.
- 10 2. The echo canceler according to claim 1, wherein:
said control register is adapted to configure a span length of said echo canceler module.
- 15 3. The echo canceler according to claim 2, wherein:
said span length is adapted to be operably reconfigurable.
4. The echo canceler according to claim 1, wherein:
said control register is adapted to configure a step size
- 20 relating to adaptation of said echo canceler module.
5. The echo canceler according to claim 4, wherein:
said step size is adapted to be operably reconfigurable.
- 25 6. The echo canceler according to claim 1, wherein:
said control register is adapted to configure an ability to update tap information relating to said echo canceler module.

7. The echo canceler according to claim 6, wherein:
said ability to update tap information is adapted to be
operably reconfigurable.

5 8. The echo canceler according to claim 1, wherein:
said control register is adapted to select one of a plurality of
possible adaptation modes of said echo canceler module.

10 9. The echo canceler according to claim 8, wherein:
said selection is operably reconfigurable.

15 10. The echo canceler according to claim 1, wherein:
said control register is adapted to select between sub-band
center clipping and full-band center clipping with respect to said echo
canceler module.

11. The echo canceler according to claim 10, wherein:
said selection is operably reconfigurable.

20 12. The echo canceler according to claim 1, wherein:
said control register is adapted to select between sub-band
echo cancellation and full-band echo cancellation.

25 13. The echo canceler according to claim 12, wherein:
said selection is operably reconfigurable.

14. The echo canceler according to claim 1, wherein:
said echo canceler module is adapted to configurably
receive an input signal from two of:

- 5 a microphone,
 a telephone line in, and
 handset in.

15. A method of configuring an echo canceler module as
either an acoustic echo canceler or as a hybrid echo canceler, said
10 method comprising:

- configuring said echo canceler module as one of said
acoustic echo canceler and said hybrid echo canceler;
 operating said echo canceler module in an operation mode
utilizing said echo canceler module as configured; and
15 reconfiguring said echo canceler module as the other of said
acoustic echo canceler and said hybrid echo canceler.

16. The method of configuring an echo canceler module as
either an acoustic echo canceler or as a hybrid echo canceler according
20 to claim 15, wherein said reconfiguring comprises:
 changing a span length of said echo canceler module.

17. The method of configuring an echo canceler module as
either an acoustic echo canceler or as a hybrid echo canceler according
25 to claim 15, wherein said reconfiguring comprises:
 changing an adaptation speed of said echo canceler
module.

18. The method of configuring an echo canceler module as either an acoustic echo canceler or as a hybrid echo canceler according to claim 15, wherein said reconfiguring comprises:

5 changing an enablement status of a tap update ability of said echo canceler module.

19. The method of configuring an echo canceler module as either an acoustic echo canceler or as a hybrid echo canceler according to claim 15, wherein said reconfiguring comprises:

10 changing an adaptation mode of said echo canceler module.

20. The method of configuring an echo canceler module as either an acoustic echo canceler or as a hybrid echo canceler according to claim 15, wherein said reconfiguring comprises:

15 selecting between sub-band center clipping or full-band center clipping with respect to said echo canceler module.

21. The method of configuring an echo canceler module as either an acoustic echo canceler or as a hybrid echo canceler according to claim 15, wherein said reconfiguring comprises:

20 selecting between sub-band echo cancellation or full-band echo cancellation with respect to said echo canceler module.

22. Apparatus for configuring an echo canceler module as either an acoustic echo canceler or as a hybrid echo canceler, comprising:

means for configuring said echo canceler module as one of said acoustic echo canceler and said hybrid echo canceler;

5 means for operating said echo canceler module in an operation mode utilizing said echo canceler module as configured; and

means for reconfiguring said echo canceler module as the other of said acoustic echo canceler and said hybrid echo canceler.

10

ABSTRACT

A configurable adaptive echo canceler which can perform acoustical echo cancellation (AEC) or hybrid echo cancellation (HEC) under software control. Particular parameters based on the particular application can be associated with either a suitable AEC or a suitable HEC, and the parameters are made selectable through the use of a control register. Exemplary parameters are accuracy of filter coefficients, a span select to manipulate the expected length of the echo path, a step size to adjust the adaptation of the echo cancellation, enablement of a tap update, selection of adaptation mode, center clipper selection, and sub-band or full-band echo cancellation. With the use of audio line switching, the configurable echo canceler can allow various modes of operation of the telephone, some of which may require an AEC in the installed unit and/or some of which may require an HEC. For instance, in a cordless telephone application, in an intercom mode, a configurable echo canceler in a cordless handset receiver and a configurable echo canceler in a base unit may each be configured as AECs. In a base speakerphone mode, the configurable echo canceler in the base unit may be configured to provide both HEC and AEC, while the configurable echo canceler in the cordless handset receiver may be configured as an AEC. In a handset speakerphone mode, the configurable echo canceler in the base unit may be configured as an HEC, while the configurable echo canceler in the cordless handset receiver may be configured as an AEC.

110

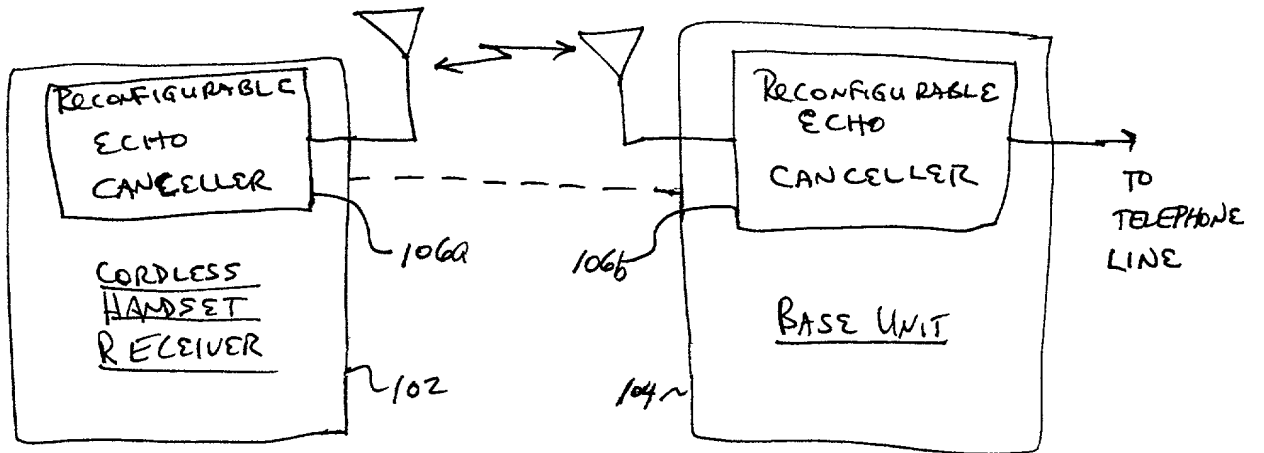


FIG. 1

FIG. 2 is a block diagram of an echo canceller system. The system includes a control register (202) connected to a series of switches (SW1 through SW8). The switches are connected to an echo canceller (204) which is also connected to an echo canceller filter tap bank (206). The output of the echo canceller (204) is added to the input signal (A) at a summing junction (112) to produce the final output (C). The entire system is enclosed in a dashed box (106).


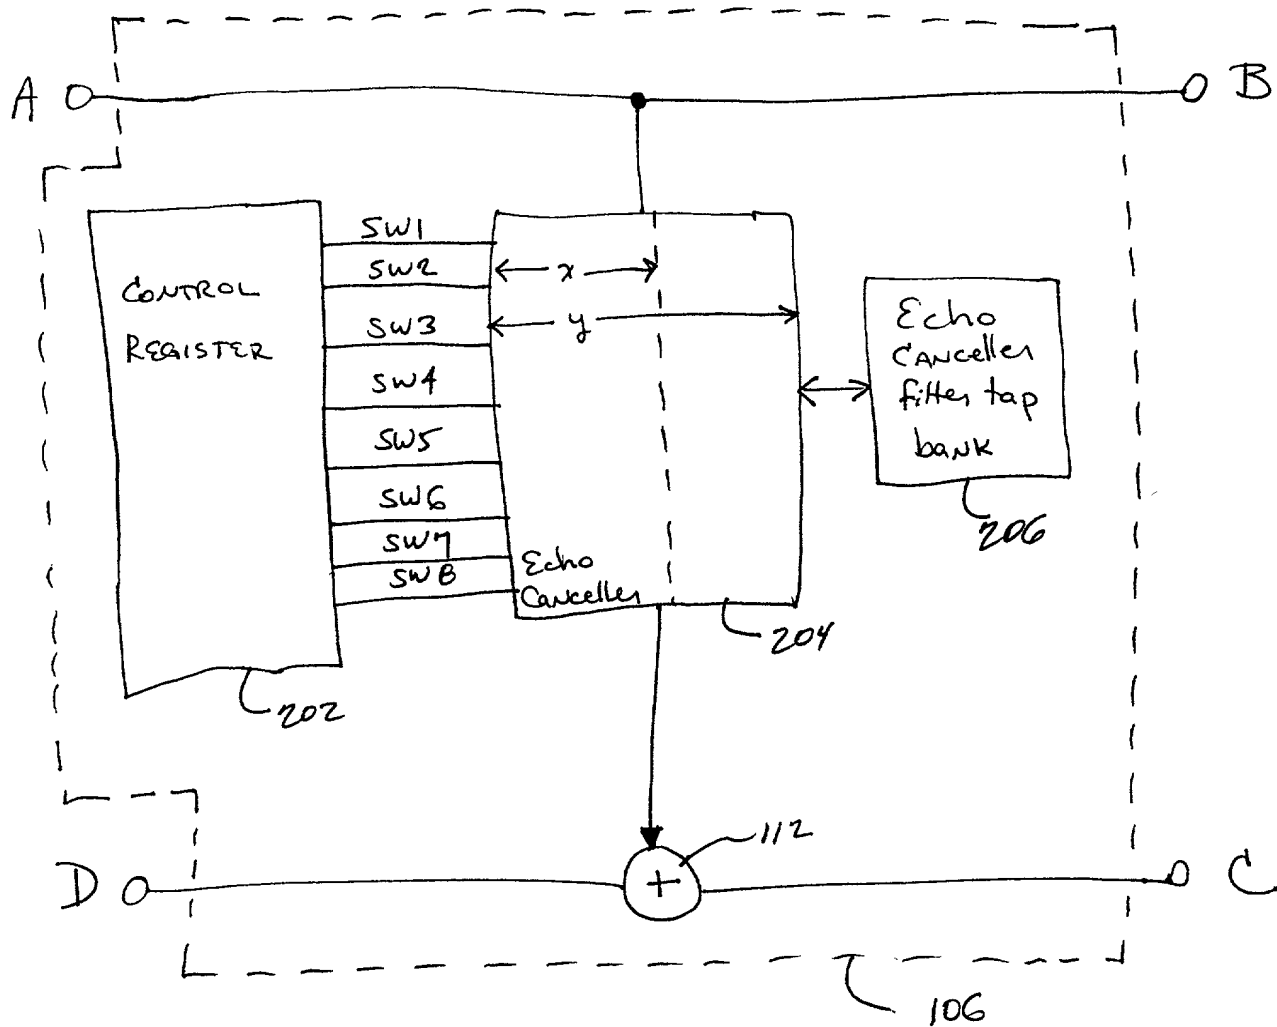


FIG. 2

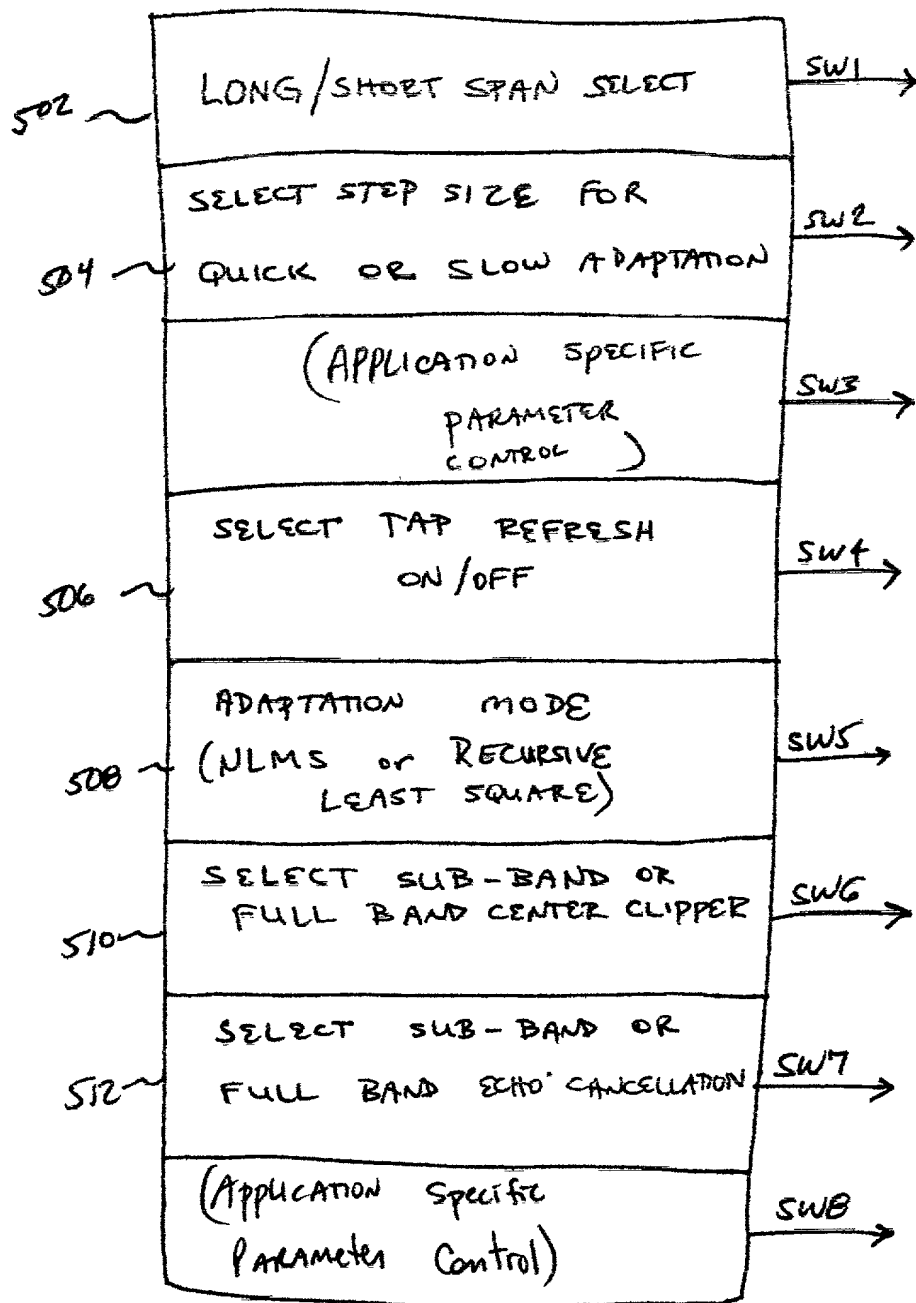

202

CONTROL REGISTER

FIG. 3

BASE UNIT

HEC

| | |
|---|--------------------|
| A | microphone-in |
| B | telephone line-out |
| C | telephone line-in |
| D | speaker out |

FIG. 4A

BASE UNIT

AEC

| | |
|---|---------------|
| A | line-in |
| B | speaker out |
| C | microphone-in |
| D | line-out |

FIG. 4B

HANDSET

AEC

| | |
|---|-----------------------------------|
| A | microphone-in |
| B | handset-out to base or to handset |
| C | handset-in from base or handset |
| D | handset speaker |

FIG. 5

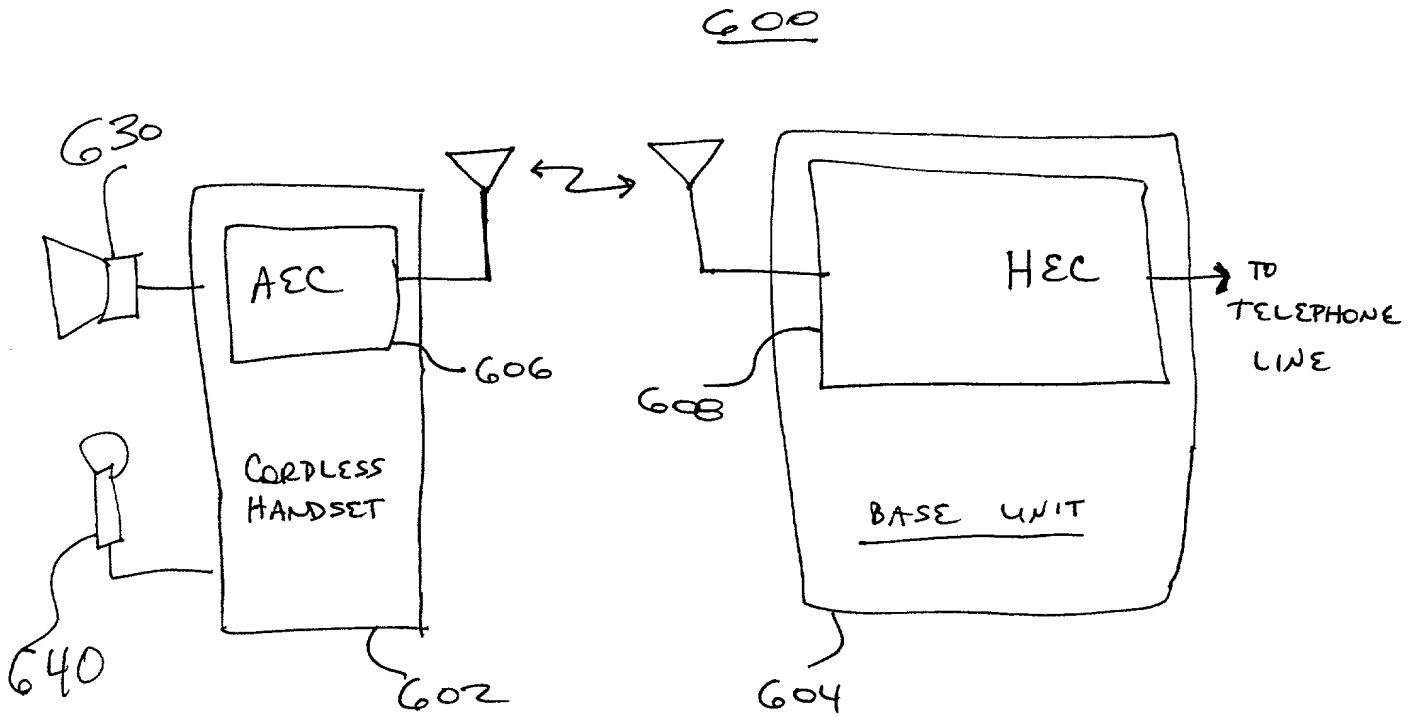


FIG. 6

PRIOR ART

IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **CONFIGURABLE ECHO CANCELLER** the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

| | |
|-------------------------|--------------------|
| Lester H. Birnbaum | (Reg. No. 25830) |
| Richard J. Botos | (Reg. No. 32016) |
| Jeffery J. Brosemer | (Reg. No. 36096) |
| Kenneth M. Brown | (Reg. No. 37590) |
| Donald P. Dinella | (Reg. No. 39961) |
| Guy Eriksen | (Reg. No. P-41736) |
| Martin I. Finston | (Reg. No. 31613) |
| James H. Fox | (Reg. No. 29379) |
| Barry H. Freedman | (Reg. No. 26166) |
| Julio A. Garceran | (Reg. No. 37138) |
| Mony R. Ghose | (Reg. No. 38159) |
| Jimmy Goo | (Reg. No. 36528) |
| Anthony Grillo | (Reg. No. 36535) |
| Stephen M. Gurey | (Reg. No. 27336) |
| John M. Harman | (Reg. No. 38173) |
| Donald E. Hayes, Jr. | (Reg. No. 33245) |
| John W. Hayes | (Reg. No. 33900) |
| Mark A. Kurisko | (Reg. No. 38944) |
| Irena Lager | (Reg. No. 39260) |
| Christopher N. Malvone | (Reg. No. 34866) |
| Scott W. McLellan | (Reg. No. 30776) |
| Martin G. Meder | (Reg. No. 34674) |
| Geraldine Monteleone | (Reg. No. 40097) |
| John C. Moran | (Reg. No. 30782) |
| Michael A. Morra | (Reg. No. 28975) |
| Gregory J. Murgia | (Reg. No. 41209) |
| Claude R. Narcisse | (Reg. No. 38979) |
| Joseph J. Opalach | (Reg. No. 36229) |
| Neil R. Ormos | (Reg. No. 35309) |
| Eugen E. Pacher | (Reg. No. 29964) |
| Jack R. Penrod | (Reg. No. 31864) |
| Daniel J. Piotrowski | (Reg. No. P-42079) |
| Gregory C. Ranieri | (Reg. No. 29695) |
| Scott J. Rittman | (Reg. No. 39010) |
| Eugene J. Rosenthal | (Reg. No. 36658) |
| Bruce S. Schneider | (Reg. No. 27949) |
| Ronald D. Slusky | (Reg. No. 26585) |
| David L. Smith | (Reg. No. 30592) |
| Patricia A. Verlangieri | (Reg. No. P-42201) |
| John P. Veschi | (Reg. No. 39058) |
| David Volejnicek | (Reg. No. 29355) |
| Charles L. Warren | (Reg. No. 27407) |

Eli Weiss

(Reg. No. 17765)

I hereby appoint the attorney(s) on ATTACHMENT A as associate attorney(s) in the aforementioned application, with full power solely to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected with the prosecution of said application. No other powers are granted to such associate attorney(s) and such associate attorney(s) are specifically denied any power of substitution or revocation.

Full name of 1st joint inventor: **Richard M. UBOWSKI**

Inventor's
signature *Richard M. Ubowski* Date 1-13-99

Residence: **Harleysville, Montgomery County, Pennsylvania**

Citizenship: **USA**

Post Office Address: **537 Paterno Drive, Harleysville, Pennsylvania 19438**

Full name of 2nd joint inventor: **Vasu IYENGAR**

Inventor's
signature *Vasu Iyyar* Date 1/15/1999

Residence: **Allentown, Lehigh County, Pennsylvania**

Citizenship: **CANADA**

Post Office Address: **913 Cold Spring Road, Unit 9, Allentown, Pennsylvania
18103**

ATTACHMENT A

Attorney Name(s): William H. Bollman, Esq. Reg. No.: 36,457

Telephone calls should be made to **Farkas and Manelli PLLC** at:

Phone No.: 202-261-1020

Fax No.: 202-887-0336

All written communications are to be addressed to:

Farkas and Manelli PLLC
2000 M Street, N.W.
7th Floor
Washington, D.C. 20036-3307